


# StrongMate F80

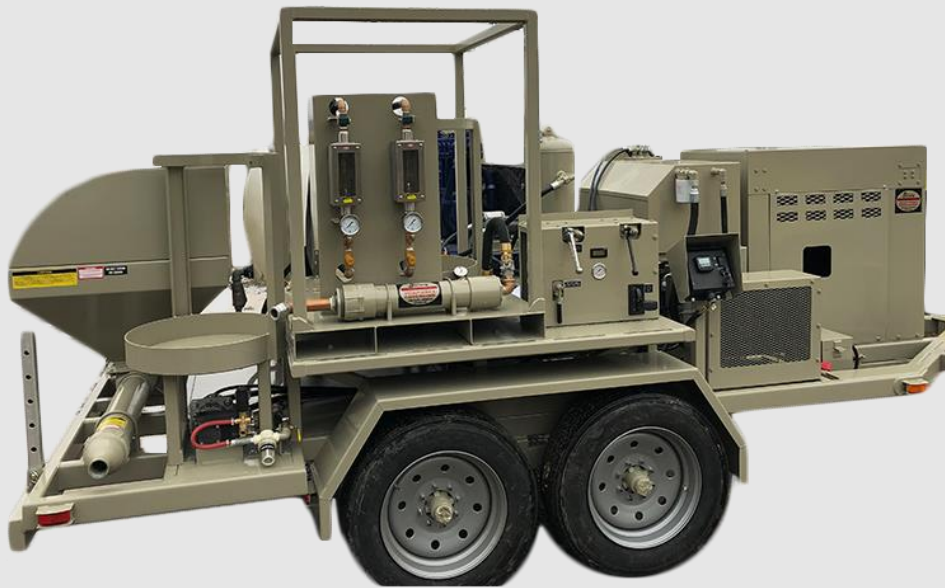

## Specifications:

**Engine:** 67 HP Tier 4 Final diesel engines equipped with full instrumentation and safety shut down systems.

**Material Pump:** #80 Progressive Cavity Pump, chrome rotor, natural rubber stator. 50GPM slurry output- 30yrds<sup>3</sup>@50% Cellular- 60yrds<sup>3</sup>@75% Cellular

**Water System:** 110 Gal Holding Capacity; Hydraulic Water Pump  
*Optional: 3500psi Pressure Washer*

**Air Compressor:** Quincy 40 CFM @ 200 PSI Air Compressor; Air Tank with Automatic relief valve

**Concentrate:** Dual 55gal drum holding stand

**Hopper:** 12cuft wet material holding hopper with material splash guard

**Foam Generator:** Dual King Flow Meters; Mini Dos Pump; Proprietary Strong Manufacturing Foam Nozzle; 55-Gal Secondary Drum Stand

All in one, self-contained pump!

Tier 4 Final

In-Line Foam injection!

Dual King Meters!

**Strong**  
MANUFACTURING

2301 University Dr  
Pine Bluff AR 71603

1-800-238-5042

[www.strongmfg.com](http://www.strongmfg.com)