
CONCRETE CONTRACTOR STATEMENT TO PRODUCTS 2

FloorMate80E

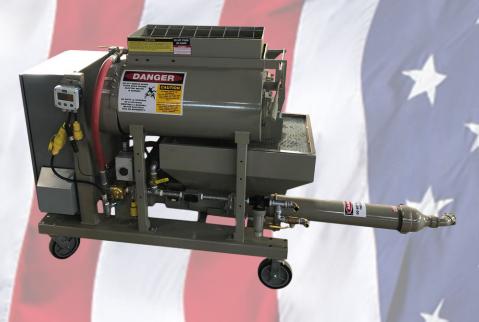

Small unit, big results!

Fully Electric

Eco Friendly

Easy operations

Non-Consumable

Specifications:

<u>Power Source:</u> Mixer power to consist of 110V, 15A (standard wall outlet). 1.5HP electric motor (with a kill switch). Material pump power source to be 240V single phase, 30A. 7.5 HP electric motor (with an e-stop).

<u>Mixer</u>: Patented Contra-Blend design, 5 cubic foot capacity, twin ribbon paddles with wiper blades, packing type seal chambers and support bearings on all shafts. Body constructed of twin, interconnected, horizontal drums. Mixer empties without tilting. *Rubber lined and adjustable packing optional.

<u>Material Pump</u>: Strong #80 chain driven progressive cavity pump with half-length rotor and stator. 5ft3 holding hopper. Adjustable output rate, 0-30 GPM. *See options list for full length rotor stator option. Pressure increases for higher vertical distances

<u>Water System</u>: A variety of water systems are available. Contact Strong Manufacturing for water system options.

<u>Frame</u>: Lightweight frame constructed from low carbon steel, equipped with casters for ease of placement.

FloorMate80	Mixer Size	Hopper Size	Yrds3/per hour	Gallons/min
Specifications:	5ft ³	5ft ³	9yrds ³	0-30

Strong

2301 University Dr Pine Bluff AR 71603

1-800-238-5042

www.strongmfg.com

