


SP60



Features & Applications

- Stucco
- Fireproofing
- Mobile #60 Pump

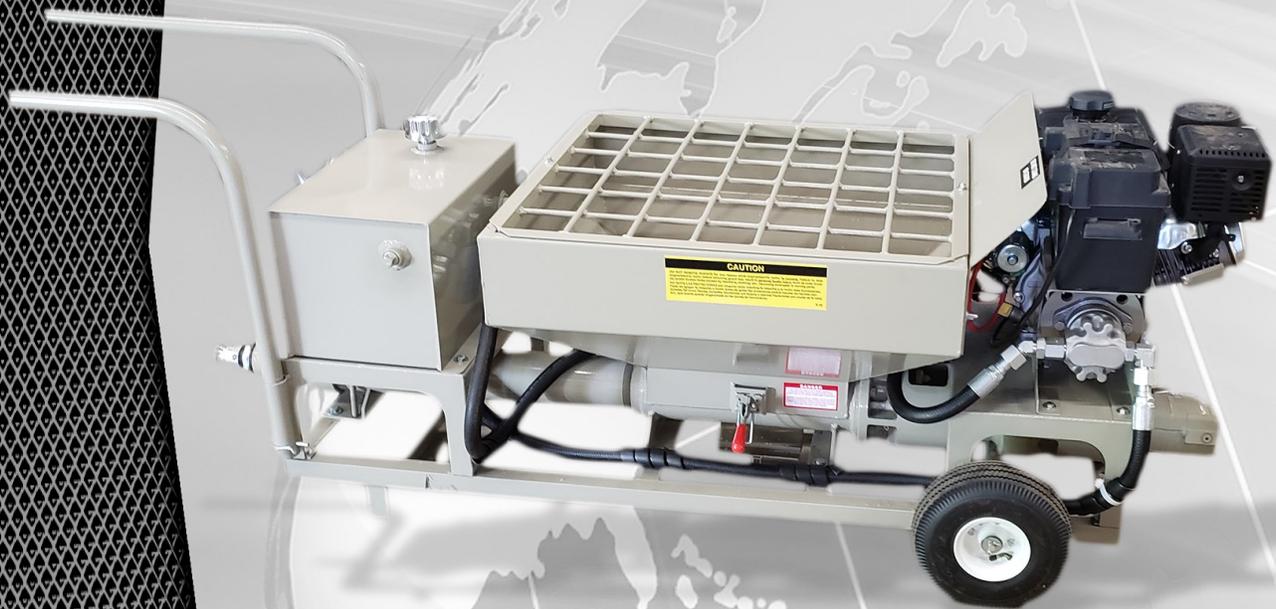

Strong
MANUFACTURING
Family Owned and Operated Since 1964

P.O. Box 8068
Pine Bluff, AR 71611
P: (870)-535-4753 (800)-238-5042
F: (870)-535-4843
www.strongmfg.com

SPECIFICATIONS

Engine: Industrial rated gasoline engine equipped with recoil start and low oil shut down safety system. Approximately 2 hours run time on one tank of fuel.

Material Pump: #60 Progressive Cavity Design Pump, Chrome Rotor, Natural Rubber Stator, 5 cubic ft. Wet Material Holding Hopper, Variable Output 0-10gpm @0 psi. Options include, Carbide Rotor, UHMW liner for hopper, Material Hose Pressure Gauge

Hydraulic System: Fixed displacement hydraulic pump, variable speed directional control valve, 10 Gallon Hydraulic Oil Reservoir

Frame: Lightweight frame constructed from low carbon steel, equipped with removable transport handles and pneumatic wheels for ease of placement.

Dimensions: Length: 6' Width: 2'2" Height: 3'1" Weight: 550lbs.